



CUBICUBI 500






• Handlebar Mount (Engineered polymer arm) Allen key 3mm x 1 Fits ø 25.4 - ø 31.8 mm (For round shape handlebar)

• Lenkerhalterung kurz (Fiberglas-Composite) Imbus-Schlüssel: 1 x 3mm Passend für runde Ø 25,4-31,8mm Lenker

• Support de guidon (Bras en polymère technique) Clé Allen 3mm x1 Convient à ø 25,4 - ø 31,8 mm (Pour guidon rond)

• Soporte para el manillar (Brazo de polímero de ingeniería) Llave Allen de 3mm x1 Válida para 25,4 - 31,8 mm (para manillares redondos)

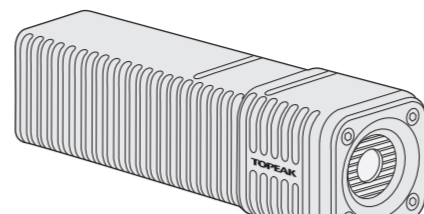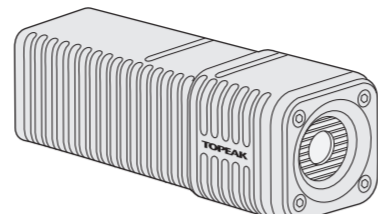

• Handlebar Mount (Longer aluminum arm) Allen keys: 2,5mm x1, 3mm x1 Fits ø 25.4 - ø 31.8 mm (For round shape handlebar)

• Lenkerhalterung lang (Aluminium) Imbus-Schlüssel: 1 x 2,5mm, 1 x 3mm Passend für runde Ø 25,4-31,8mm Lenker

• Support de guidon (Bras en aluminium) Clé Allen : 2,5 mm x1, 3mm x1 Convient à ø 25,4 - ø 31,8 mm (Pour guidon rond)

• Soporte para el manillar (Brazo de Aluminio) Llavasa Allen de 2,5mm x1, 3mm x1 Válida para 25,4 - 31,8 mm (para manillares redondos)

• Uchwyt na kierownicę (Wysięgnik z inżynieryjnego polimeru) Imbus 3mm x1 Pasuje do ø 25,4 - ø 31,8 mm (Do okrągłej kierownicy)

• ハンドルバー マウント (エンジニアリング ポリマー製 アーム) 六角レンチ : 3mm x1 取付可能径 φ 25.4 ~ φ 31.8 mm (真円形状ハンドルバー用)

• 핸들바 마운트 (엔지니어링 폴리머製 아ーム) 六角 렌치 : 3mm x1 규격 ø 25.4 - ø 31.8 mm (라운드 방식의 핸들바)

• 標準固定座 3mm 六角扳手 適用 ø 25.4 - ø 31.8mm 圓管 (For round shape handlebar)

SPECIFICATIONS

SPEZIFIKATIONEN / ESPECIFICACIONES / SPECYFIKACJA /スペック/ 사양 / 規格

Table with columns for CubiCubi 500, 850, 1200. Rows include Lamp, Battery (3.7V Lithium Ion), Charge Time, Charge (Micro-USB), Micro USB Input Port, Recharge / Discharge Number of Times, Operation Temperature, Storage Temperature, Size, and Weight.

Table with columns for CubiCubi 500, 850, 1200. Rows include Leuchtmittel (Creep® XLamp® XHP50.2), Akku (3.7V Lithium-Ionen), Ladezeit (ca. 4-6 Std.), Input (Micro-USB), and Maße (72 x 3.8 x 3.8 cm).

Table with columns for CubiCubi 500, 850, 1200. Rows include Lampe (Creep® XLamp® XHP50.2), Batterie (3.7V Lithium Ion), Temps de chargement (4 - 6 hr (Approx)), Chargeur (Micro-USB), and Port d'entrée Micro-USB.

Table with columns for CubiCubi 500, 850, 1200. Rows include Lámpara (Creep® XLamp® XHP50.2), Batería (3.7V Ion de Litio), Tiempo de carga (4 - 6 hr (approx)), Cargador (Micro-USB), and Puerto de Entrada Micro-USB.

Table with columns for CubiCubi 500, 850, 1200. Rows include Lampa (Creep® XLamp® XHP50.2), Bateria (3.7V Li-Ion), Czas ładowania (4 - 6 hr (okolo)), Ładowanie (Micro-USB), Rozmiar (72 x 3.8 x 3.8 cm), and Waga (95 g / 3.35 oz).

Table with columns for CubiCubi 500, 850, 1200. Rows include 램프 (Creep® XLamp® XHP50.2), 배터리 (3.7V 리튬이온), 충전시간 (약 4-6 시간), 충전 (마이크로USB), and 사이즈 (72 x 3.8 x 3.8 cm).

Table with columns for CubiCubi 500, 850, 1200. Rows include 램프 (Creep® XLamp® XHP50.2), 배터리 (3.7V 리튬이온), 충전시간 (4-6 시간), 충전 (마이크로-USB), and 크기 (72x3.8x3.8cm).

Table with columns for CubiCubi 500, 850, 1200. Rows include Lámpara (Creep® XLamp® XHP50.2), Batería (3.7V 리튬이온), 충전시간 (4-6 시간), 충전 (마이크로-USB), and 크기 (72 x 3.8 x 3.8 cm).

MODES / BURN TIME

MODI / LEUCHTDAUER / AUTONOMIE BATTERIE / MODOS / DURACIÓN / TRYBY / CZAS PRACY / 모드 / 点灯時間 / 모드 / 사용시간 / 模式 / 電力耗電

Table showing battery modes and burn times. Columns: BATTERY, 1260 mAh, 3000 mAh, 6000 mAh. Rows: HIGH, MIDDLE, LOW, STEADY, BLINKING. Includes a note: LOW BATTERY: THE LIGHT WILL BLINK 3 TIMES.

ON/OFF, MODE SELECTION BUTTON instructions. Includes diagrams of the button and battery level indicator. Text: Turn On / Turn Off: Press and hold for 3 seconds to turn off in any mode. Battery Level Indicator: 0-25% (recharge battery), 25-50%, 50-75%, 75-100%.

INSTALLATION

BEFESTIGUNG / INSTALACIÓN / MONTAJE / 取付方法 / 장착 / 安裝

Installation instructions for Cubicubi 500, 850, and 1200. Section 1: Handlebar Mount. Section 2: Single Box. Section 3: Quickclick System Adapter. Section 4: Garmin Computer Adapter. Includes diagrams, torque specifications, and multilingual text for each step.

